


Rectus Series 1625KA - DN 7.8

RectusTema premium European standard industrial coupling – the know-how from both brands combined in one system. Extremely robust 2-component plastic sleeve. Suitable for compressed air applications with above average air consumption.

Chart / Air

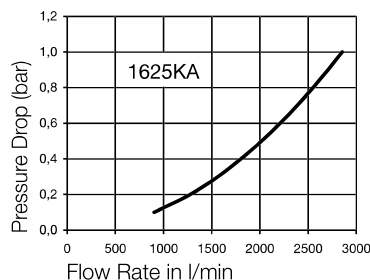

Advantages

- Single handed operation
- High grade valve technology with optimum flow performance
- Minimum coupling forces



Working Pressure

PB = 35 bar, maximum static working pressure with safety factor of 4 to 1.

Working Temperature*

-20°C up to +40°C (NBR)
depending on the medium.

*At a temperature below -20°C and above +40°C special seals are available on request.

Material


Coupling

Back Body	Brass, Nickel Plated
Valve Body	Steel, QPQ treated
Sleeve	PA6 + TPE
Valve	Brass
Spring and	AISI 301
Locking Ring	
Locking Balls	AISI 420
Seals	NBR

Plug

Steel Hardened, Zinc Plated

Coupling - Male Thread BSPT




Thread A	Order code	Box Qty
3/8"	1625KAAK17SPN	10
1/2"	1625KAAK21SPN	10

Plug - Male Thread BSPT



Thread A	Order code	Box Qty
1/4"	25SFAK13SXZ	20
3/8"	25SFAK17SXZ	20
1/2"	25SFAK21SXZ	10

Coupling - Female Thread BSPP




Thread A	Order code	Box Qty
1/2"	1625KAIW21SPN	10

Plug - Female Thread BSPP



Thread A	Order code	Box Qty
1/4"	25SFIW13SXZ	20
3/8"	25SFIW17SXZ	20

Coupling - Hose Barb



Thread A	Order code	Box Qty
9 mm	1625KATF09SPN	10
13 mm	1625KATF13SPN	10

Plug - Hose Barb



Thread A	Order code	Box Qty
9 mm	25SFTF09SXZ	20
13 mm	25SFTF13SXZ	20