


Rectus Series 24KA - DN 5.5

1/4" Industrial brass coupling conforming to ISO 6150B and US Mil. Spec 4109. Notable for brass mass design and corresponding sleeve design. Hardened steel plug counters vibrations and effects of external forces.

Chart / Air

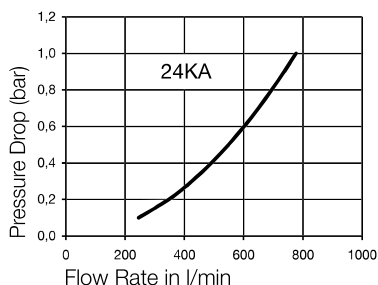

Working Pressure

PB = 35 bar, maximum static working pressure with safety factor of 4 to 1.

Working Temperature*

-20°C up to +100°C (NBR)

depending on the medium.

*At a temperature below -20°C and above +100°C special seals are available on request.

Advantages

- Single handed operation



Material

Coupling


Back Body	Brass
Valve Body	Brass
Sleeve	Brass
Valve	Brass
Spring and Locking Ring	AISI 301

Pins	AISI 420
Seals	NBR

Plug

Steel Hardened,
Nickel Plated

Coupling - Male Thread BSPP



Thread A	Order code	Box Qty
1/4"	24KAAW13MPX	20
3/8"	24KAAW17MPX	20
1/2"	24KAAW21MPX	20

Plug - Male Thread BSPT




Thread A	Order code	Box Qty
1/4"	23SFAK13SXN	20
3/8"	23SFAK17SXN	20

Coupling - Female Thread BSPP




Thread A	Order code	Box Qty
1/4"	24KAIW13MPX	20
3/8"	24KAIW17MPX	20
1/2"	24KAIW21MPX	20

Plug - Female Thread BSPP



Thread A	Order code	Box Qty
1/4"	23SFIW13SXN	20
3/8"	23SFIW17SXN	20

Coupling - Hose Barb



Thread A	Order code	Box Qty
8 mm	24KATF08MPX	20
10 mm	24KATF10MPX	20

Plug - Hose Barb



Thread A	Order code	Box Qty
6 mm	23SFTF06SXN	20
8 mm	23SFTF08SXN	20
10 mm	23SFTF10SXN	20