


Rectus Series 26KA - DN 7.2

European standard industrial profile. Universal brass coupling. Ergonomic sleeve design prevents dirt on the valve body. Series 26 plugs in brass. Series 25 steel plugs recommended for oscillating forces.

Chart / Air

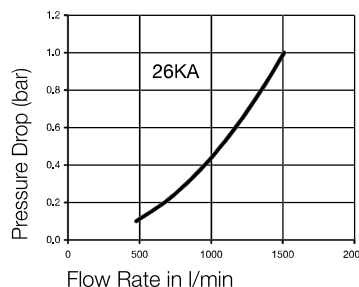

Advantages

- Single handed operation
- European standard
- Small mass size



Working Pressure

PB = 35 bar, maximum static working pressure with safety factor of 4 to 1.

Working Temperature*

-20°C up to +100°C (NBR)
depending on the medium.

*At a temperature below -20°C and above +100°C special seals are available on request.

Material


Coupling

Back Body	Brass
Valve Body	Brass
Sleeve	Brass
Valve	Brass
Spring and Locking Ring	AISI 301
Locking Pins	AISI 420
Seals	NBR

Plug


Brass

Coupling - Male Thread BSPP



Thread A	Order code	Box Qty
1/4"	26KAAW13MPX	20
3/8"	26KAAW17MPX	20
1/2"	26KAAW21MPX	20

Plug - Male Thread BSPP




Thread A	Order code	Box Qty
1/4"	26SFAW13MXX	20
3/8"	26SFAW17MXX	20

Coupling - Female Thread BSPP




Thread A	Order code	Box Qty
1/4"	26KAIW13MPX	20
1/2"	26KAIW21MPX	20

Plug - Female Thread BSPP



Thread A	Order code	Box Qty
1/4"	26SFIW13MXX	20
3/8"	26SFIW17MXX	20

Coupling - Hose Barb



Thread A	Order code	Box Qty
6 mm	26KATF06MPX	20
8 mm	26KATF08MPX	20
9 mm	26KATF09MPX	20

Plug - Hose Barb



Thread A	Order code	Box Qty
6 mm	26SFTF06MXX	20
8 mm	26SFTF08MXX	20
9 mm	26SFTF09MXX	20