



ACCESSORI PER CILINDRO PRESSORE - CLAMPING CYLINDER OPTIONALS

Tamponi in materiale plastico da avvitarsi sullo stelo.
Plastic pads to screw on the cylinder rod.




COD: $\phi 35$ = TPN00001




COD: $\phi 40$ = TPN00002


Controsagoma spingipezzo
Lock for profile

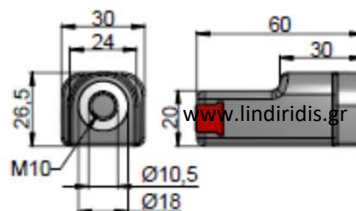

COD: GRC00300





COD: 19.3 = TPN00009



COD: 29.7 = TPN00010

Morsa con bloccaggio a leva e guida 10mm (solo per cilindri $\phi 35-40$)
Vice with lever locking and 10mm guide (only for $\phi 35-40$ cylinder)

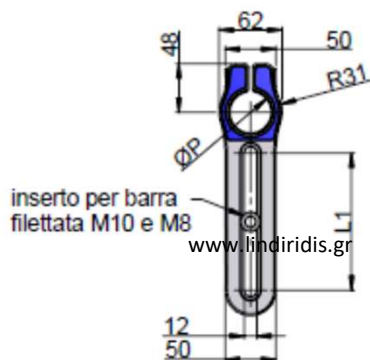

codice	ϕ cilindro cylinder	type	L	ϕP	L1
KCL00247	$\phi 35$	short	193	40	80
KCL00248	$\phi 35$	long	248	40	135
KCL00249	$\phi 40$	short	193	40	80
KCL00250	$\phi 40$	long	248	40	135

NORME DI USO E MANUTENZIONE



Questa apparecchiatura rispetta severe specifiche qualitative tuttavia un uso improprio od inadeguato potrebbe compromettere il funzionamento e decadere la garanzia. L'uso di olio lubrificante non consigliato fa decadere la garanzia.
NON E' UN DISPOSITIVO DI SICUREZZA.

USE AND MAINTENANCE

This unit complies with strict quality specifications. Incorrect use or misuse of this unit will compromise performance and will invalidate the warranty.

Not recommended lubricating oil will invalidate the warranty.
THIS UNIT IS NOT A SAFETY DEVICE.



Prima di ogni operazione assicurarsi che il componente non sia in pressione.
Ristabilirla solo dopo aver controllato l'esattezza delle connessioni.

Warning before using this unit please ensure that you have made the correct port connection and that the unit is de-pressurised. When any maintenance work is done ensure the unit is also de-pressurised.