

Inline Straight Through Vacuum Filters


CT Series 3/4" - 6"

Features

- Compact design for space restrictions; min. service area
- Inlet above element for extended element life & maintenance intervals
- Corrosive resistant cast aluminum top with machined connections and integrated baffle design
- T-style design minimizes piping requirements
- Black powder coat carbon steel drop down bucket

Technical Specifications

- Vacuum Rating: medium vacuum service*
- Temp (continuous): min -26°C (-15°F) max 104°C (220°F)
- Filter change out differential: 37-50 mbar over initial ΔP
- Polyester: 99%+ removal efficiency standard to 5 micron
- Paper: 99%+ removal efficiency standard to 2 micron

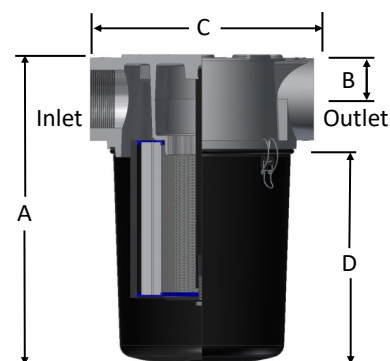

Inlet / Outlet		Assembly m ³ /hr Rating	Assembly Part Number		Dimensions (mm)				Suggested Service Height (mm)	Approx. Weight (kg)
Size	Type		Polyester	Paper	A	B	C	D		
3/4"	BSPP	43	CT-8451-076C	CT-8450-076C	209	25	127	151	127	1.6
1"	BSPP	68	CT-897-101C	CT-896-101C	336	39	178	258	229	5.4
1 1/4"	BSPP	102	CT-897-126C	CT-896-126C	336	39	178	258	229	5.2
1 1/2"	BSPP	136	CT-897-151C	CT-896-151C	336	39	178	258	229	5.1
2"	BSPP	298	CT-851-201C	CT-850-201C	324	50	229	229	229	7.2
2 1/2"	BSPP	357	CT-851-251C	CT-850-251C	324	50	238	229	229	6.8
3"	BSPP	510	CT-235P-301C	CT-234P-301C	473	69	343	328	254	14
4"	BSPP	884	CT-235P-401C	CT-234P-401C	473	69	343	328	254	12
6"	BSPP	1869	CT-275P-601C	CT-274P-601C	462	99	483	249	254	20
6"	BSPP	2549	CT-374P-601C	CT-375P-601C	740	99	483	527	381	21

Note: CT 2" & 2 1/2" models: element seals on the base of the housing.

Learn More

For more information about Solberg products and finding the right solutions for your equipment needs, visit us at **SolbergMfg.com**.

Contact Us

solbergmfg.com/locations

