

Side Channel Blower Silencers

SLCR, SLCRT Series 1/2" - 4"

Features


- Absorptive media pack
- Designed for minimal pressure drop
- For inlet and discharge inline air service
- Corrosive resistant gray powder coat carbon steel: 1/2" to 1 1/2" connections; epoxy coat finish: 2" to 4" connections

Technical Specifications


- Max. temperature (continuous): 107°C (225°F)
- Due to the wide range of equipment and environments, please contact factory for typical noise attenuation for your application



Inlet/Outlet		Assembly m3/hr Rating	Assembly Part Number	Dimensions (mm)			Approx. Weight (kg)
Size	Type			A	B	C	
1"	BSPP	71	SLCR101	304	19	64	1.0
1 1/4"	BSPP	94	SLCR126	306	19	64	1.0
1 1/2"	BSPP	264	SLCR151	306	19	64	1.3
2"	BSPP	459	SLCR201	400	19	92	1.8
2 1/2"	BSPP	509	SLCR251	533	33	118	3.6
3"	BSPP	560	SLCR301	657	40	132	4.5
4"	BSPP	978	SLCR401	627	43	254	12
1/2"	NPT	43	SLCRT050	352	43	64	1.0
3/4"	NPT	60	SLCRT075	368	51	64	1.0
1"	BSPT	71	SLCRT101	368	51	64	1.0
1 1/4"	BSPT	94	SLCRT126	368	51	64	1.0
1 1/2"	BSPT	264	SLCRT151	368	51	64	1.3
2"	BSPT	459	SLCRT201	470	54	92	1.8
2 1/2"	BSPT	509	SLCRT251	601	67	118	3.6
3"	BSPT	560	SLCRT301	711	67	132	4.5
4"	BSPT	978	SLCRT401	745	102	254	12

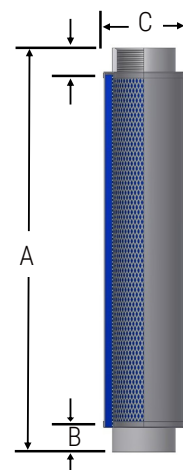

Typical Noise Attenuation

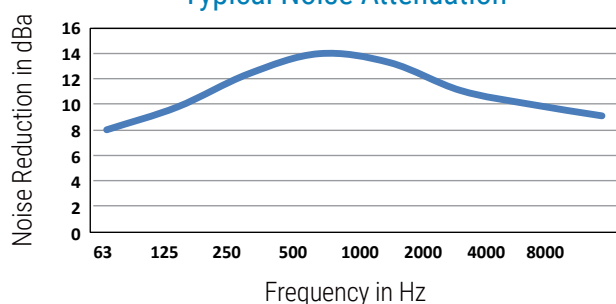

Learn More

For more information about Solberg products and finding the right solutions for your equipment needs, visit us at **SolbergMfg.com**.